

VANSE



TELEHANDLER

Shandong Vanse Machinery Technology Co., Ltd.

VANSE

伸缩臂叉车
TELEHANDLER

WSC1840

Engineering telehandler






Aerial work platform



Construction bucket



Three hooks

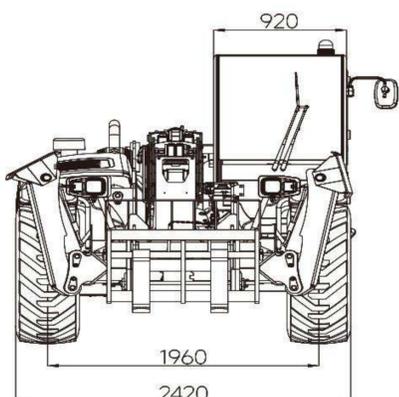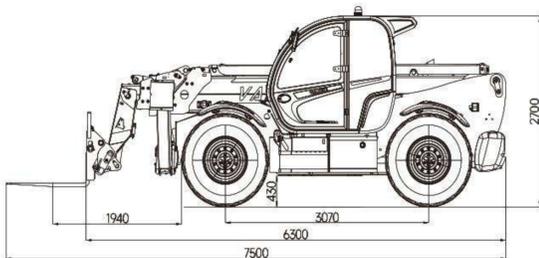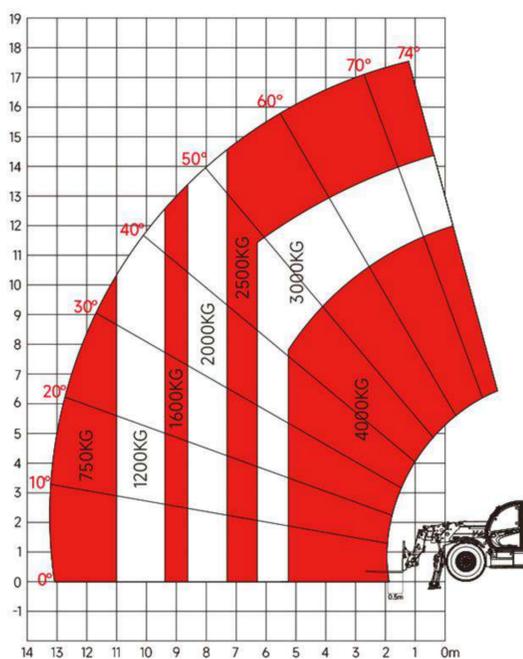

承载能力 Capability

载重	Max Capacity	4000kg / 8818 lb
最大举升高度	Max Lifting Height	17.6 m / 57.74 ft
最大水平前伸距	Max Outreach	13.1 m / 42.98 ft
铲斗崛起力	Breakout Force with Bucket	7500 daN / 16861 lbf
最大高度举升能力	Lift Capacity at Maximum height	2500 kg / 5512 lb
最大水平前伸举升能力	Lift Capacity at Maximum reach	750 kg / 1653 lb

尺寸 Dimension

长度	Overall Length to Carriage	6.3 m / 20.67 ft
总宽	Overall Width	2.42 m / 7.94 ft
总高	Overall Height	2.7 m / 8.86 ft
轴距	Wheelbase	3.07 m / 10.07 ft
轮距	Front Track	1.96 m / 6.43 ft
底座离地间隙	Ground Clearance	0.43 m / 16.93 inch
车架左右倾角	Tilt Angle	±9°
转弯半径	Tilt Angle	4.2 m / 13.78 ft
轮胎型号	Tilt Angle	440/80R24
轮胎型号	Tilt Angle	0.98 m / 3.22 ft

性能 Performance

臂起升	Lifting	7.5s - 17.5s
臂下降	Lowering	13.5s - 23.5s
臂伸出	Extension	12.5s - 22.5s
臂收回	Retraction	8s - 18s

引擎 Engine

品牌	Engine Brand	Cummins	Perkins	Yuchai
型号	Engine Model	QS83.9 - C110	904J-E36TA	YCF36100-S500
排量	Capacity of cylinders	3.9 L(238 cid)	3.62L(221 cid)	3.62L(221 cid)
冷却方式	Cooling Method	Water Cooling	Water Cooling	Water Cooling
最大功率	Max Power	81kw/2200r (109hp/2200r)	74.4kw/2400r (100hp/2400r)	74kw/2200r(99 hp/2200r)
最大力矩	Max Torque	480 Nm(354 lb-ft)	430 Nm(317 lb-ft)	420 Nm (310 lb-ft)
牵引力	Traction Force	70.5 KN	70.5 KN	70.5 KN

传动 Transmission

行驶速度	Travel Speed	0-30km/h / 0-19 mph
爬坡能力	Gradeability	30°
驱动型式	Drive Mode	4WD
档位数(前进/后退)	Number of Gears (forward/reverse)	2 / 2
驻车制动	Parking Brake	Automatic parking
行车制动	Service Brake	Wet Brake

油箱容量 Tank Capacities

柴油	Fuel Tank	140 L / 37.0 US gal
液压油	Hydraulic Oil	180 L / 47.6 US gal

货叉 Fork

货叉规格	Forks Length/ Width/ Section	1200x150x50 mm/ /47.24"x5.91"x1.97"
货叉向上倾角/上倾翻角度	Tilt-Up Angle	16°
货叉向下倾角/下倾翻角度	Tilt-Down Angle	117°

重量 Weight

整机重量(带叉)	Machine Weight (with forks)	12600kg / 27778lb
----------	-----------------------------	-------------------

VANSE

伸缩臂叉车
TELEHANDLER

WSC1440

Engineering telehandler






Aerial work platform



Construction bucket



Three hooks

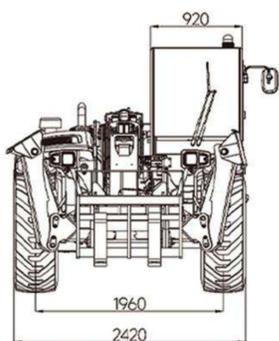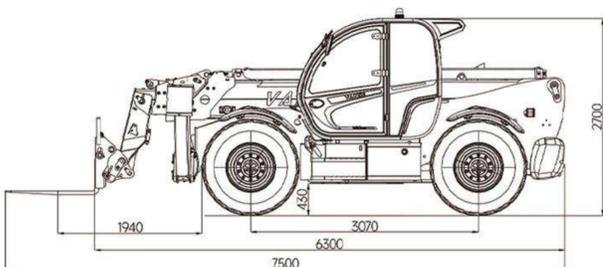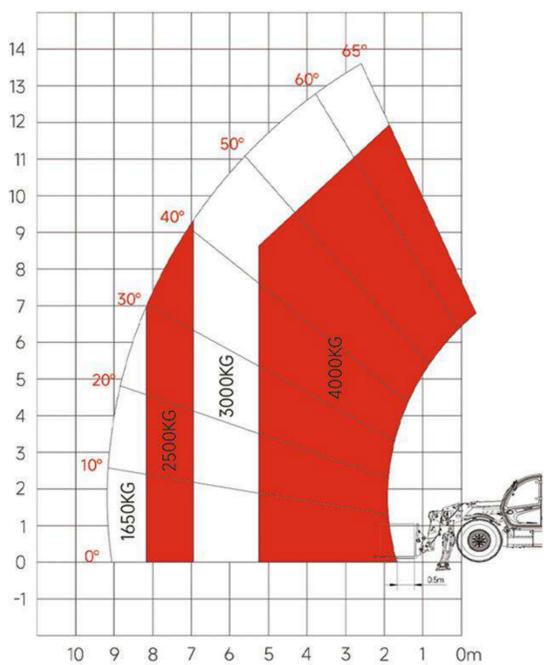

承载能力 Capability				
载重	Max Capacity	4000kg / 8818 lb		
最大举升高度	Max Lifting Height	13.5 m / 44.29 ft		
最大水平前伸距	Max Outreach	9.5 m / 31.17 ft		
铲斗崛起力	Breakout Force with Bucket	7500 daN / 16861 lbf		
最大高度举升能力	Lift Capacity at Maximum height	3000 kg / 6614 lb		
最大水平前伸举升能力	Lift Capacity at Maximum reach	1650 kg / 3638 lb		
尺寸 Dimension				
长度	Overall Length to Carriage	6.08 m / 19.95 ft		
总宽	Overall Width	2.42 m / 7.94 ft		
总高	Overall Height	2.7 m / 8.86 ft		
轴距	Wheelbase	3.07 m / 10.07 ft		
轮距	Front Track	1.96 m / 6.43 ft		
底座离地间隙	Ground Clearance	0.43 m / 16.93 inch		
车架左右倾角	Tilt Angle	±9°		
转弯半径	Tilt Angle	4.2 m / 13.78 ft		
轮胎型号	Tilt Angle	440/80R24		
轮胎型号	Tilt Angle	0.98 m / 3.22 ft		
性能 Performance				
臂起升	Lifting	11s - 17.5s		
臂下降	Lowering	16s - 23.5s		
臂伸出	Extension	15s - 22.5s		
臂收回	Retraction	11s - 18s		
引擎 Engine				
品牌	Engine Brand	Cummins	Perkins	Yuchai
型号	Engine Model	QS83.9 - C110	904J-E36TA	YCF36100-S500
排量	Capacity of cylinders	3.9 L(238 cid)	3.62L(221 cid)	3.62L(221 cid)
冷却方式	Cooling Method	Water Cooling	Water Cooling	Water Cooling
最大功率	Max Power	81kw/2200r (109hp/2200r)	74.4kw/2400r (100hp/2400r)	74kw/2200r(99 hp/2200r)
最大力矩	Max Torque	480 Nm(354 lb-ft)	430 Nm(317 lb-ft)	420 Nm (310 lb-ft)
牵引力	Traction Force	70.5 KN	70.5 KN	70.5 KN
传动 Transmission				
行驶速度	Travel Speed	0-30km/h / 0-19 mph		
爬坡能力	Gradeability	30°		
驱动型式	Drive Mode	4WD		
档位数(前进/后退)	Number of Gears (forward/reverse)	2 / 2		
驻车制动	Parking Brake	Automatic parking		
行车制动	Service Brake	Wet Brake		
油箱容量 Tank Capacities				
柴油	Fuel Tank	140 L / 37.0 US gal		
液压油	Hydraulic Oil	180 L / 47.6 US gal		
货叉 Fork				
货叉规格	Forks Length/ Width/ Section	1200x150x50 mm/ /47.24"x5.91"x1.97"		
货叉向上倾角/上倾翻角度	Tilt-Up Angle	16°		
货叉向下倾角/下倾翻角度	Tilt-Down Angle	117°		
重量 Weight				
整机重量(带叉)	Machine Weight (with forks)	10800kg / 23809lb		

www.vansecm.com

山东省济宁市兖州经济开发区创业路 88号

No. 88, Chuangye Rd., Yanzhou Economic Development Zone, Jining city, Shandong Province, China

VANSE

伸缩臂叉车
TELEHANDLER

WSC735

Agricultural telehandler






Round clip



Mixed fodder clip



Agricultural bucket

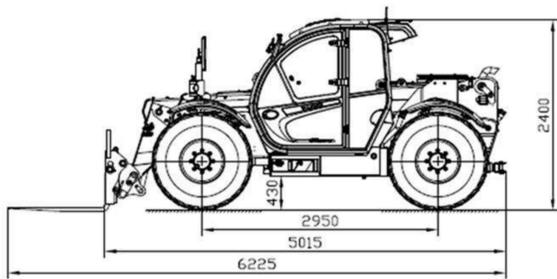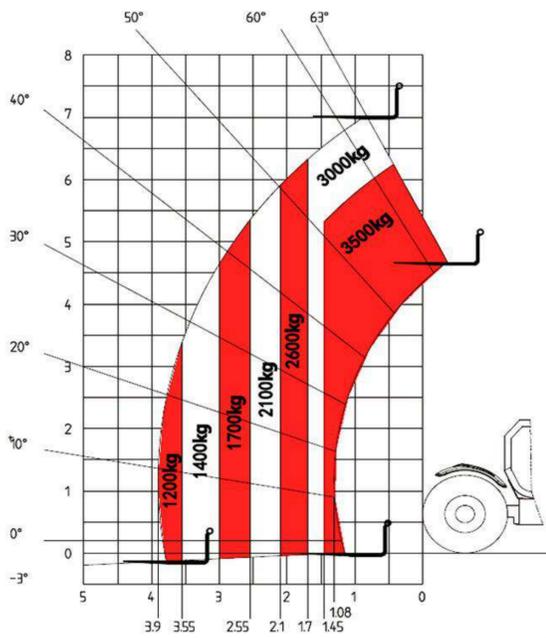

尺寸 Dimension

长度	Overall length	5015mm / 16.44 ft
宽度	Overall width	2300mm / 7.55 ft
高度	Overall height	2400mm / 7.87 ft
轴距	Wheelbase	2950mm / 9.55 ft
最小离地间距	Minimum ground clearance	430mm / 16.93 inch
轮胎	Tire	460/70R24

性能 Performance

额定负载	Rated load	3500KG / 7716 lb
机器重量	Machine weight	7600KG / 16755 lb
最大举升高度	Maximum lifting height	7m / 22.97 ft
最大水平前伸距	Maximum outreach	3.9m / 12.9 ft
最大理论爬坡能力	Maximum theoretical gradeability	50%
驱动形式	Drive form	4WD
最大行驶速度	Maximum travel speed	40km/h / 24.85 mph
主臂上升时间	Main boom rising time	8.2s
主臂下降时间	Main boom lowering time	6.4s
伸缩臂伸长时间	Telescopic arm extension time	8s
伸缩臂回缩时间	Telescopic arm retraction time	5s
柴油容量	Diesel capacity	130L
液压油量	Hydraulic oil volume	150L

引擎 Engine

品牌	Engine Brand	Cummins	Perkins	Yuchai
型号	Engine Model	QSB3.9 - C110	904J-E36TA	YCF36100-S500
排量	Capacity of cylinders	3.9 L(238 cid)	3.62L(221 cid)	3.62L(221 cid)
冷却方式	Cooling Method	Water Cooling	Water Cooling	Water Cooling
最大功率	Max Power	81kw/2200r (109hp/2200r)	74.4kw/2400r (100hp/2400r)	73.5kw/2200r (98.6hp/2200r)

主要配置 Main configuration




驱动桥	Axles	Dana/Carraro
变速箱	Gearbox	Dana/Carraro
封闭式行走泵	Closed travel pump	Danfoss
工作泵	Working pump	Danfoss
行走马达	Travel motor	Danfoss

VANSE

伸缩臂叉车
TELEHANDLER

WSC625

Agricultural telehandler

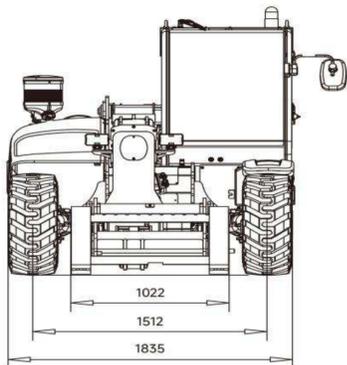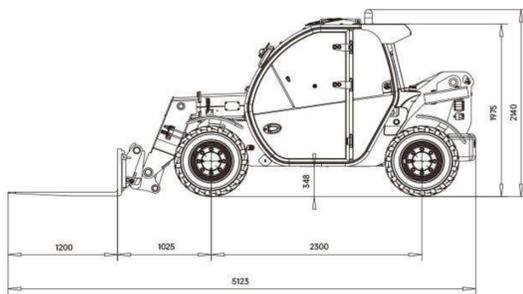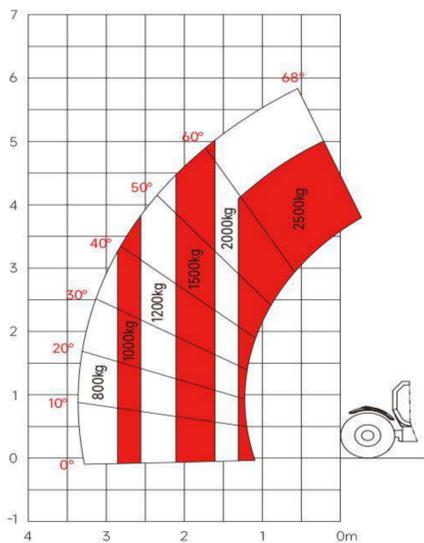

尺寸 Dimension

长度	Overall length	3923 mm / 12.87 ft
宽度	Overall width	1835 mm / 6.02 ft
高度	Overall height	2140 mm / 7.02 ft
轴距	Wheelbase	2300 mm / 7.55 ft
最小离地间距	Minimum ground clearance	348 mm / 13.70 inch
轮胎	Tire	12-16.5

性能 Performance

额定负载	Rated load	2500 KG / 5512 lb
机器重量	Machine weight	4900 KG / 10803 lb
最大举升高度	Maximum lifting height	5.95 m / 19.52 ft
最大水平前伸距	Maximum outreach	2.19 m / 7.19 ft
最小转弯半径	Minimum turning radius	3100 mm / 10.17 ft
最大水平提升能力	Maximum horizontal lifting capacity	800 kg / 1764 lb
柴油容量	Diesel capacity	65 L / 17.17 US gal
液压油量	Hydraulic oil volume	95L / 25.10 US gal
驱动形式	Drive form	4WD
最大行驶速度	Maximum travel speed	27km/h / 16.78 mph
伸缩臂伸长时间	Telescopic arm extension time	7s
伸缩臂回缩时间	Telescopic arm retraction time	4.5s
主臂上升时间	Main boom rising time	8s
主臂下降时间	Main boom lowering time	6.5s

引擎 Engine

品牌	Engine Brand	Kubota
型号	Engine Model	Kubota V3307
最大功率	Max Power	55.4 kw / 2600rpm(74.3 hp / 2600rpm)

主要配置 Main configuration

驱动桥	Axles	Carraro
变速箱	Gearbox	Carraro
封闭式行走泵	Closed travel pump	Danfoss
工作泵	Working pump	Danfoss
行走马达	Travel motor	Danfoss

ATTACHMENTS

VANSE telehandler offers a wide range of attachments to cater for various work requirements and application scenarios.



液压悬浮式调距货叉
Hydraulic suspension adjustable distance fork



360°旋转货叉
360° rotating fork



浮动货叉
Floating fork



倾翻货叉
Tipping fork



通用铲斗
Universal bucket



多功能农用抓斗
Multifunctional agricultural grab



建筑铲斗
Construction bucket



取料斗
Take the hopper



简易平台
Simple platform



圆包夹
Round clip



高强度草料夹
High strength forage clip



混合草料夹
Mixed fodder clip



盆&桶夹
Basin & Bucket Clamp



封闭式清扫器
Enclosed cleaner



大容量粪抓
Large capacity feces grab



带抓齿粪叉
Fecal fork with gripping tines



鲨鱼齿抓斗
Shark tooth grab



四针草料叉
Four-needle forage fork



轮胎机械手
Double hook



单吊钩
Single hook



双吊钩
Double hook



三吊钩
Three hooks



加长吊臂
Extended boom



混凝土吊斗
Concrete bucket